


◆ Flat XY Stage with Aperture

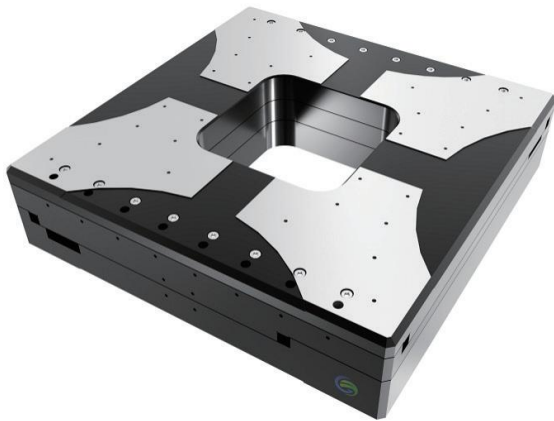

Features

- Non-contact direct-drive linear motor drive for high dynamic response
- Optical linear encoder for high precision
- High stiffness anti-creep cross roller guide
- Excellent positioning accuracy and dynamic performance
- Large hollow aperture


Description

The stage adopts XY unibody, orthogonality design with ultra-thin profile and large aperture size. High-precision, high-stiffness linear motion in horizontal X/Y axis with 2 degrees of freedom.

Applications

- Semiconductor
- Flat panel display
- Optical fiber alignment
- Biomedicine
- Double-sided processing
- Genetic detection

Interface Definition

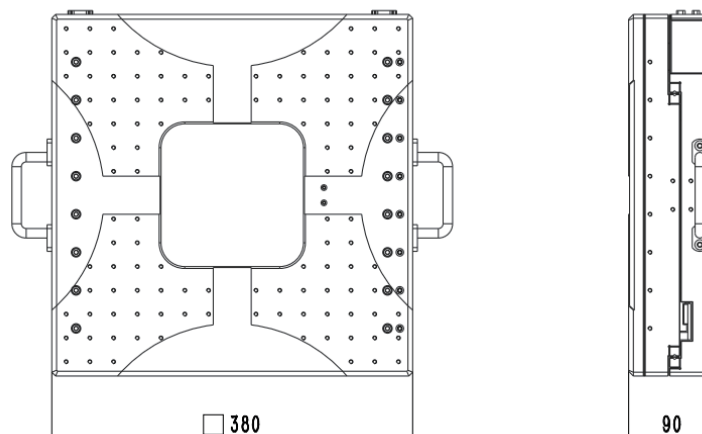

*Interface dimensions from PLA90

Technical Specifications

	PLA90-100	PLA90-200	PLA90-300
Travel range	±50 mm	±100 mm	±150 mm
Max. velocity	0.3 m/s	0.5 m/s	0.5 m/s
Max. acceleration	0.4 g	0.4 g	0.4 g
Accuracy	±1.5 μm	±2 μm	±2 μm
Bidirectional repeatability	±0.5 μm		
Straightness	±2 μm	±3 μm	±4 μm
Flatness	±2 μm	±3 μm	±4 μm
Pitch	15 arcsec	20 arcsec	25 arcsec
Roll	15 arcsec	20 arcsec	25 arcsec
Yaw	15 arcsec	20 arcsec	25 arcsec
Orthogonality	12 arcsec	15 arcsec	20 arcsec
Mechanical properties			
Moving mass_Upper axis	5.8 Kg	8.4 Kg	11 Kg
Moving mass_Lower axis	14.5 Kg	17.1 Kg	19.7 Kg
Max. load	10 Kg	10 Kg	10 Kg
Stage mass	21 Kg	25.5 Kg	30 Kg
Dimensions	380 mmX380 mmX90 mm	380 mmX380 mmX90 mm	430 mmX430 mmX90 mm
Material	Aviation aluminum,black anodized		

Customization Information

The series is configured with options that can be selected based on the user's actual application. Options include travel, encoder, and more.

Table 1 Travel Options

-100	100mm travel stroke platform with linear motors and limit
-200	200mm travel stroke platform with linear motors and limit
-300	300mm travel stroke platform with linear motors and limit

Table 2 Encoder Options

-S1	Incremental analog optical linear encoder, 1Vpp
-S2	Incremental digital optical linear encoder, RS422
-S3	Absolute optical linear encoder, BISS